


MARK	DATE	REVISION	REVISER	APP. BY
△				
△				
△				

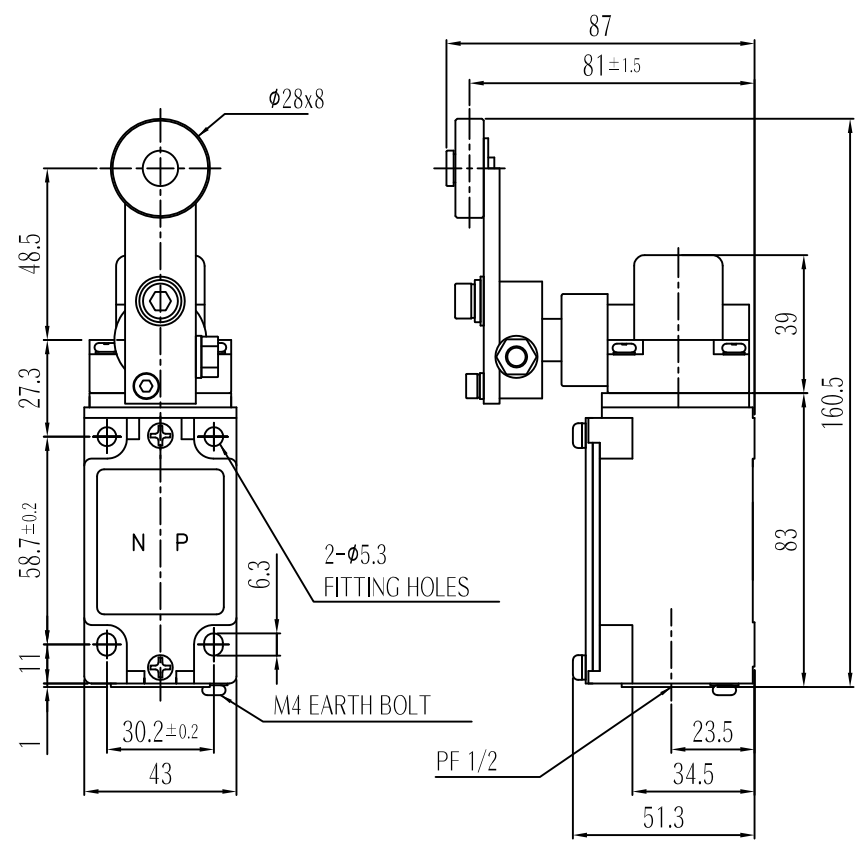

MODEL No.	SW2TS-RL
MATERIAL	HEAD & BODY - DIE CAST BRASS BOLT, NUT, ROLLER & ETC. - SUS304
CONTACT	2CKT-DB, 1A1B, 250VAC 6A
PROTECTION GRADE	WATER & DUST PROOF - IP66
CABLE ENTRY	PF 1/2
COLOR	MAKER STANDARD
INSULATION RESISTANCE	100M Ω MIN. at 500V DC

■ Operating Characteristics

OF max.g	1,380
RF min.g	260
PT	15° \pm 5°
MD max.	5°
TT min	60°

ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH					
FOR LINEAR DIMENSIONS		f	g	h		Nr.	DWG. NO.	TITLE / NAME	MAT'L	QTY
	0.5~3	± 0.05	± 0.1	± 0.2	± 0.5	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW
FOR ANGULAR DIMENSIONS	3~6	± 0.1	± 0.2	± 0.5	± 1	U.H LEE	U.H LEE			3
	6~30	± 0.15	± 0.3	± 0.8	± 1.5	OUT-LINE DRAWING (SW2TS-RL)				
	30~120	± 0.2	± 0.5	± 1.2	± 2.5	MODEL SW2TS-RL				
	120~400	± 0.3	± 0.8	± 2	± 4	DWG. NO. SW2TS-RL-OUT				
	400~1000	± 0.5	± 1.2	± 3	± 6	SCALE 1/1 SIZE A3 REV 00 SHEET 1/1				
	0~10	$\pm 1^\circ$	$\pm 1'30''$	$\pm 3'$	$\pm 5'$	light				
FOR ANGULAR DIMENSIONS	10~50	$\pm 0'30''$	$\pm 1'$	$\pm 2'$	$\pm 3'$					
	50~120	$\pm 0'20''$	$\pm 0'30''$	$\pm 1'$	$\pm 2'$					
	120~400	$\pm 0'10''$	$\pm 0'13''$	$\pm 0'30''$	$\pm 0'50''$					
	400~1000	$\pm 0'05''$	$\pm 0'08''$	$\pm 0'13''$	$\pm 0'20''$					