




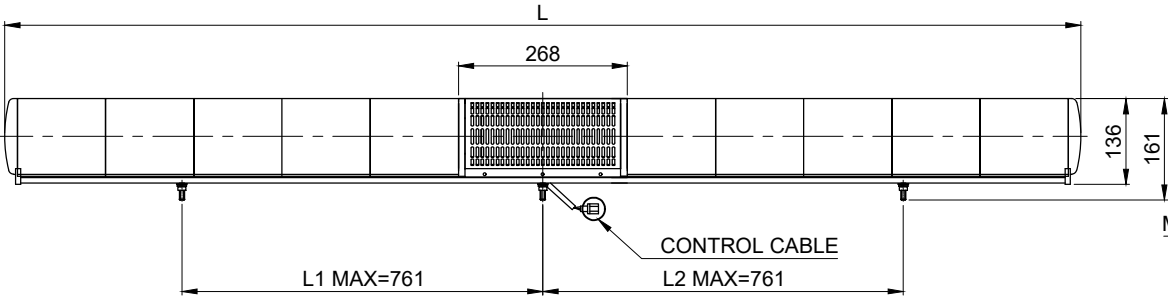

MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO	ELML
MATERIAL	HOUSING-PC
	LENS-PC
	REFLECTOR-HEAT RESISTING ABS
	SPEAKER COVER-SUS
	BOARD-AL
COLOR OF LENS	RED(), AMBER(), GREEN(), BLUE()
REV. PER MIN	60~80
USE VOLT.	DC12V
	DC24V
VOLUME	MAX. 126dB at 1m
PROTECTION GRADE	WATER & DUST PROOF IP56
COLOR OF HOUSING	MAKER STANDARD
ACTION	LED LAMP STROBE LIGHT

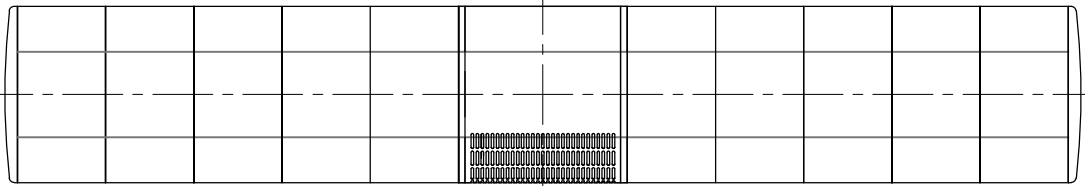

L(LENGTH)	
ELM-1 (BLOCKS 2)	588mm
ELM-2 (BLOCKS 4)	868mm
ELM-3 (BLOCKS 6)	1148mm
ELM-4 (BLOCKS 8)	1428mm
ELM-5 (BLOCKS 10)	1708mm

※ POWER CABLE :CTF-0.75-4C 3m

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	3~6			±0.3	±0.5	S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4							
	0~10	±1°		±1°30'	±3°							
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							
							ELML OUTLINE DRAWING			MODEL ELML		
						DWG. NO. ELML_OUT			SCALE N/S			
						SIZE A4			REV 00		SHEET 1/1	

