
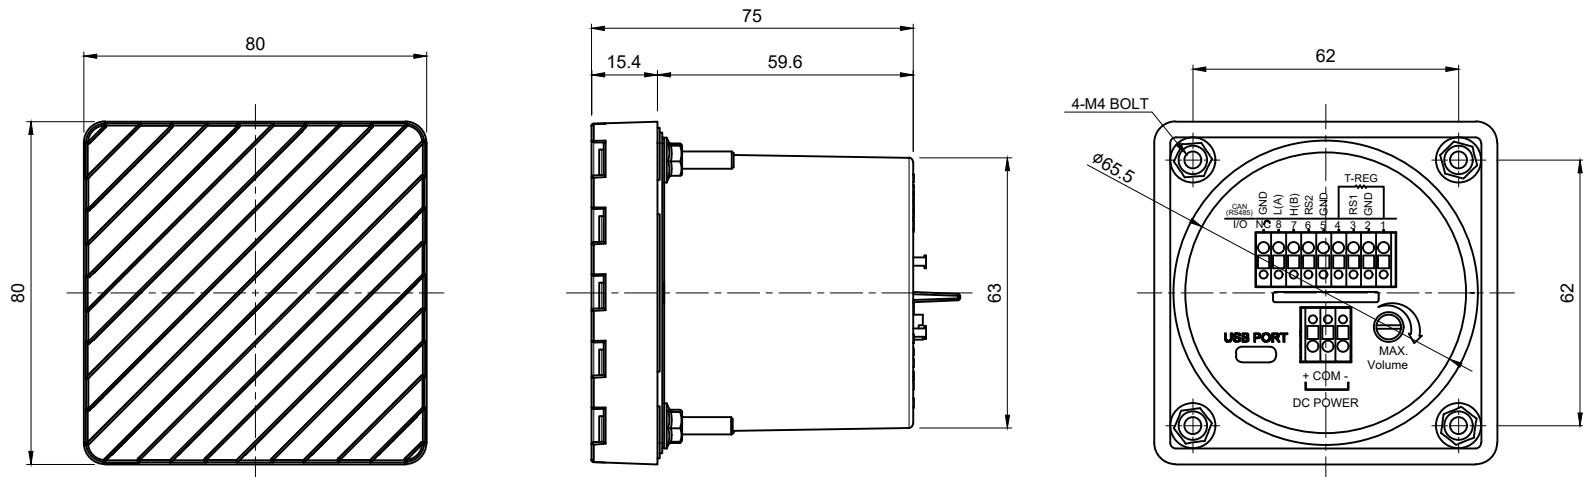



MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO	CPK-RS485		
MATERIAL	HOUSING-ABS		
	COVER-ABS		
USE VOLT.	CURRENT	DC12V~24V	0.600A
VOLUME	Max. 85dB at 1m		
PROTECTION GRADE	WATER & DUST PROOF IP65		
COLOR	MAKER STANDARD		



ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-					
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE					
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY H.M.SEO	CHKD BY J.Y.KIM	CHKD BY 	APRV BY J.W.KIM	VIEW 3	DATE 2022. 11. 18.						
	3~6			±0.3	±0.5												
	6~30	±0.1	±0.2	±0.5	±1	TITLE CPK-RS485 OUTLINE DRAWING											
	30~120	±0.15	±0.3	±0.8	±1.5							MODEL CPK-RS485					
	120~400	±0.2	±0.5	±1.2	±2.5	DWG. NO. CPK-RS485_OUTLINE											
400~1000	±0.3	±0.8	±2	±4													
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'							±3°	SCALE 1/1		SIZE A4	REV 00	SHEET 1/1	
	10~50	±0°30'		±1°							±2°						
	50~120	±0°20'		±0°30'							±1°						
	120~400	±0°10'		±0°13'	±0°30'												

Qlight

A4(297X210)