



MARK	DATE	REVISION	REVISER	APP. BY
△				
△				
△				



LAYER	L
1	122
2	163
3	204
4	245
5	286

MODEL NO	PSQWTL(PSQWTL-BZ)/PSQWTLF(PSQWTLF-BZ)				
MATERIAL	LENS-PC				
	BODY-ABS				
COLOR OF LENS	COVER-ABS				
	RED(),AMBER(),GREEN(),BLUE(),WHITE()				
FLASHES PER MIN.	60~80				
USE VOLT.	LED	CURRENT			
			DC12V		
			DC24V		
			AC110V		
			ø5		
				AC220V	
				MAX. 0.066A/LAYER1	
				MAX. 0.048A/LAYER1	
				MAX. 0.022A/LAYER1	
				MAX. 0.017A/LAYER1	
SOUND LEVER	MAX. 85dB/m				
PROTECTION GRADE	WATER & DUST PROOF IP65 (BUZZER&SPEAKER TYPE IP54)				
CABLE ENTRY	ø13 LEAD HOLE				
COLOR OF HOUSING	MAKER STANDARD				

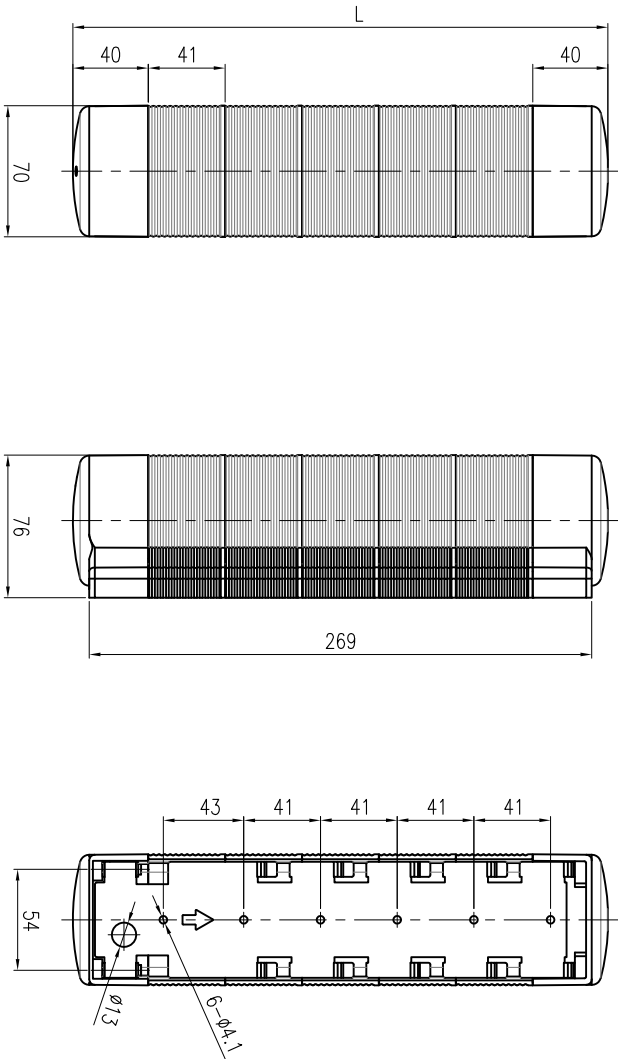

-	-	-	-	-
Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY
DSND BY	CHKD BY	CHKD BY	APRV BY	DATE
J.H.JUNG	Y.H.JOO		J.K.HAN	150429
TITLE		MODEL	PSQWTL	
PSQWTL-OUT LINE DRAWING				

DWG. NO.		PSQWTL-001		
SCALE	SIZE	REV	SHEET	
N/S	A4	00	1/1	



WWW.ALIGHT.COM