
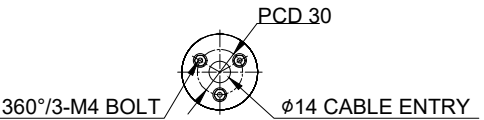


MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO			STG50ML/ ML-BZ/ STG50MLF/ MLF-BZ				
MATERIAL			HOUSING-ABS				
			LENS-AS				
			-				
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    ), WHITE(    )				
FLASHES. PER MIN			60 ~ 80				
USE VOLT.	LED	CURRNET	DC12V	0.5W	0.055A/LAYER1		
			DC24V		0.050A/LAYER1		
VOLUME			MAX. 85dB at 1m				
PROTECTION GRADE			WATER & DUST PROOF IP65 (BZ TYPE-IP54)				
CABLE ENTRY			ø14 LEAD HOLE				
COLOR OF HOUSING			MAKER STANDARD				
ACTION			LED STEADY / FLASHING LIGHT				

STG50ML : DC  
STG50MLF : DC  
STG50ML-BZ : DC

STG50MLF-BZ : DC

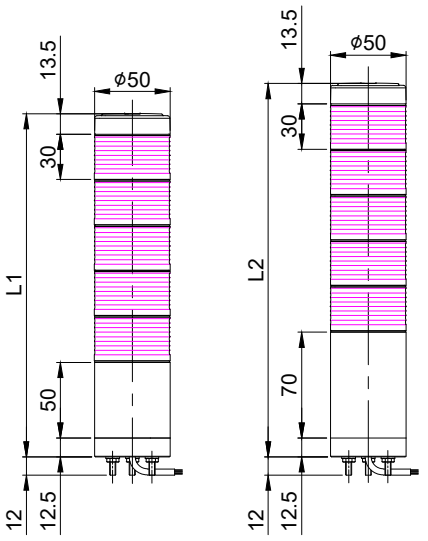

LAYER	L1	L2
1	106	126
2	136	156
3	166	186
4	196	216
5	226	246

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	⊙	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1			TITLE STG50ML SERIES OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5			MODEL STG50ML SERIES					
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4								
	0~10	±1°		±1°30'	±3°			DWG. NO. STG50ML SERIES-OUT					
	10~50	±0°30'		±1°	±2°								
	50~120	±0°20'		±0°30'	±1°			SCALE N/S SIZE A4 REV 00 SHEET 1/1					
	120~400	±0°10'		±0°13'	±0°30'								

