



QTEX - WALL MOUNT TYPE



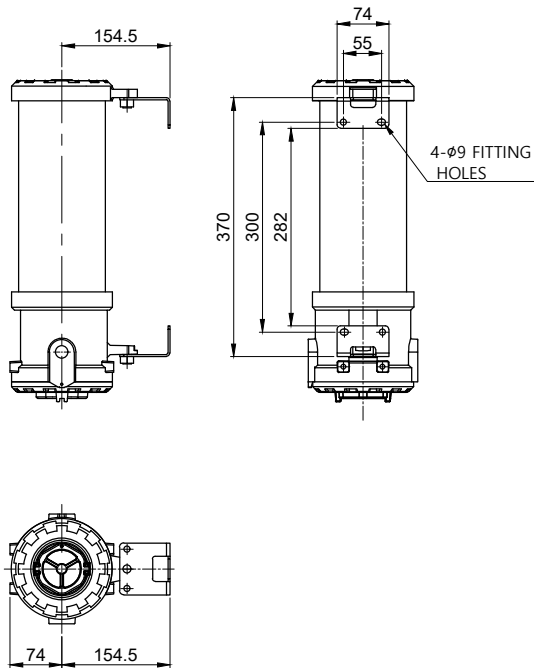

QTEX - DIRECT MOUNT TYPE

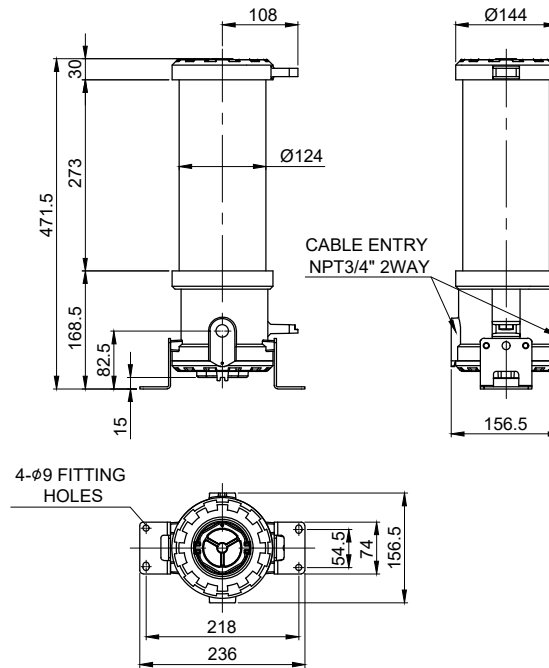

| MARK | DATE | REVISION | REVISER | APP. BY |
|------|------|----------|---------|---------|
| 1    |      |          |         |         |
| 2    |      |          |         |         |
| 3    |      |          |         |         |

|                  |     |                  |   |    |             |  |
|------------------|-----|------------------|---|----|-------------|--|
| MODEL NO         |     |                  | QTEX  |    |             |  |
| MATERIAL         |     |                  | LENS-TEMPERED GLASS                             |    |             |  |
|                  |     |                  | FILTER LENS-AS                                  |    |             |  |
|                  |     |                  | HOUSING-AL                                      |    |             |  |
|                  |     |                  | REFLECTOR-HEAT RESISTANT ABS                    |    |             |  |
| COLOR OF LENS    |     |                  | RED(    ), AMBER(    ), GREEN(    ), BLUE(    ) |    |             |  |
| USE VOLT.        | LED | CURRNET (1LAYER) | DC12V   | 5W | MAX. 0.085A |  |
|                  |     |                  | DC24V   |    | MAX. 0.064A |  |
|                  |     |                  | AC110V ~220V                                    |    | MAX. 0.052A |  |
| PROTECTION GRADE |     |                  | WATER & DUST PROOF IP66                         |    |             |  |
| CABLE ENTRY      |     |                  | CABLE ENTRY NPT 3/4" 2WAY                       |    |             |  |
| COLOR OF HOUSING |     |                  | MAKER STANDARD                                  |    |             |  |
| ACTION           |     |                  | LED STEADY / FLASHING LIGHT                     |    |             |  |

| ISO2768-1 : CLASS OF TOLERANCE |         |        |      |        |        | SURFACE<br>FINISH   | -                   |                     |  |                    |           |                    |     |           |  |
|--------------------------------|---------|--------|------|--------|--------|---|---------------------|---------------------|--|--------------------|-----------|--------------------|-----|-----------|--|
| FOR<br>LINEAR<br>DIMENSIONS    |         | f      | m    | Ⓢ      | v      |   | Nr.                 | DWG. NO.            | TITLE/ NAME  |                    |           | MAT'L              | QTY | REFERENCE |  |
|                                | 0.5~3   | ±0.05  | ±0.1 | ±0.2   | -      |   | DSND BY<br>J.H.PARK | CHKD BY<br>J.H.PARK | CHKD BY<br> | APRV BY<br>J.K.HAN | VIEW<br>3 | DATE<br>2019.04.19 |     |           |  |
|                                | 3~6     |        |      | ±0.3   | ±0.5   |   |                     |                     |  |                    |           |                    |     |           |  |
|                                | 6~30    | ±0.1   | ±0.2 | ±0.5   | ±1     |   |                     |                     |  |                    |           |                    |     |           |  |
|                                | 30~120  | ±0.15  | ±0.3 | ±0.8   | ±1.5   |   |                     |                     |  |                    |           |                    |     |           |  |
|                                | 120~400 | ±0.2   | ±0.5 | ±1.2   | ±2.5   |   |                     |                     |  |                    |           |                    |     |           |  |
| 400~1000                       | ±0.3    | ±0.8   | ±2   | ±4     |        |   |                     |                     |  |                    |           |                    |     |           |  |
| FOR ANGULAR<br>DIMENSIONS      | 0~10    | ±1°    |      | ±1°30' | ±3°    |  |                     |                     | DWG. NO.   |                    | QTEX_OUT  |                    |     |           |  |
|                                | 10~50   | ±0°30' |      | ±1°    | ±2°    |   |                     |                     |  |                    |           |                    |     |           |  |
|                                | 50~120  | ±0°20' |      | ±0°30' | ±1°    |   |                     |                     |  |                    |           |                    |     |           |  |
|                                | 120~400 | ±0°10' |      | ±0°13' | ±0°30' |   |                     |                     |  |                    |           |                    |     |           |  |
|                                |         |        |      |        |        |   |                     |                     |  |                    |           |                    |     |           |  |
|                                |         |        |      |        |        |   |                     |                     | SCALE<br>N/S   | SIZE<br>A4         | REV<br>00 | SHEET<br>1/1       |     |           |  |