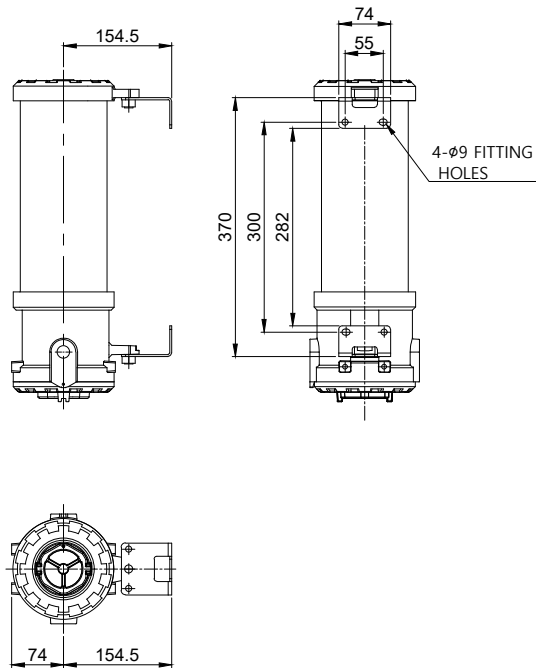
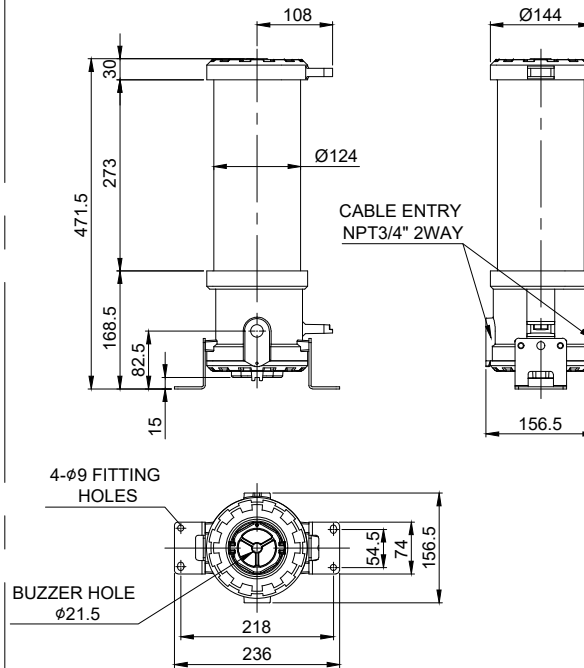


QTEXB - WALL MOUNT TYPE





QTEXB - DIRECT MOUNT TYPE



※ Buzzer is located on the bottom of the product in case of buzzer type model

MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO			QTEXB			
MATERIAL			LENS-TEMPERED GLASS			
			FILTER LENS-AS			
			HOUSING-AL			
			REFLECTOR-HEAT RESISTANT ABS			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE()			
USE VOLT.	LED	CURRNET (1LAYER)	DC12V	5W	0.175A	
			DC24V		0.134A	
			AC110V ~220V		MAX. 0.077A	
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP66			
CABLE ENTRY			CABLE ENTRY NPT 3/4" 2WAY			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY / FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-								
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME			MAT'L	QTY	REFERENCE	
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY C.S.GWAK	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2021.09.28				
	3~6			±0.3	±0.5										
	6~30	±0.1	±0.2	±0.5	±1										
	30~120	±0.15	±0.3	±0.8	±1.5										
	120~400	±0.2	±0.5	±1.2	±2.5										
	400~1000	±0.3	±0.8	±2	±4										
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO.		QTEXB_OUT				
	10~50	±0°30'		±1°	±2°										
	50~120	±0°20'		±0°30'	±1°				SCALE		SIZE	REV	SHEET		
	120~400	±0°10'		±0°13'	±0°30'				1/1		A4	01	1/1		

Qlight