



1 2 3 4 5 6

A



B

C

D

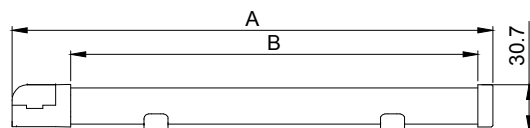

2-φ4.2 HOLES(SLOT HOLE)



※ POWER CABLE : DC TYPE - UL2464 AWG22(0.3sq X 2C) 400mm  
AC TYPE - VCTFK (0.75sq) x 2C 400mm

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		PSQELT			
MATERIAL		SIDE COVER : ABS			
		LENS-PC			
		BRACKET-SUS201			
COLOR OF LENS		UNCLEAR			
MODEL		PSQELT-200	PSQELT-300	PSQELT-400	PSQELT-500
CURRENT	DC24V	MAX. 0.145A	MAX. 0.215A	MAX. 0.285A	MAX. 0.358A
	AC110V	MAX. 0.196A	MAX. 0.202A	MAX. 0.206A	MAX. 0.216A
	AC220V	MAX. 0.095A	MAX. 0.098A	MAX. 0.100A	MAX. 0.105A
LED		CHIP LED			
PROTECTION GRADE		NON WATER-PROOF			

MODEL	A	B	C
PSQELT-200	249	200	16~170
PSQELT-300	349	300	16~270
PSQELT-400	449	400	16~370
PSQELT-500	549	500	16~470

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	(C)	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
	6~30	±0.1	±0.2	±0.5	±1		TITLE PSQELT OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5		MODEL PSQELT					
	120~400	±0.2	±0.5	±1.2	±2.5		DWG. NO. PSQELT					
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4							
	0~10	±1°		±1°30'	±3°							
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'		SCALE	SIZE	REV	SHEET		
							N/S	A4	00	1/1		

1 2 3 4 5 6

A4(297X210)