

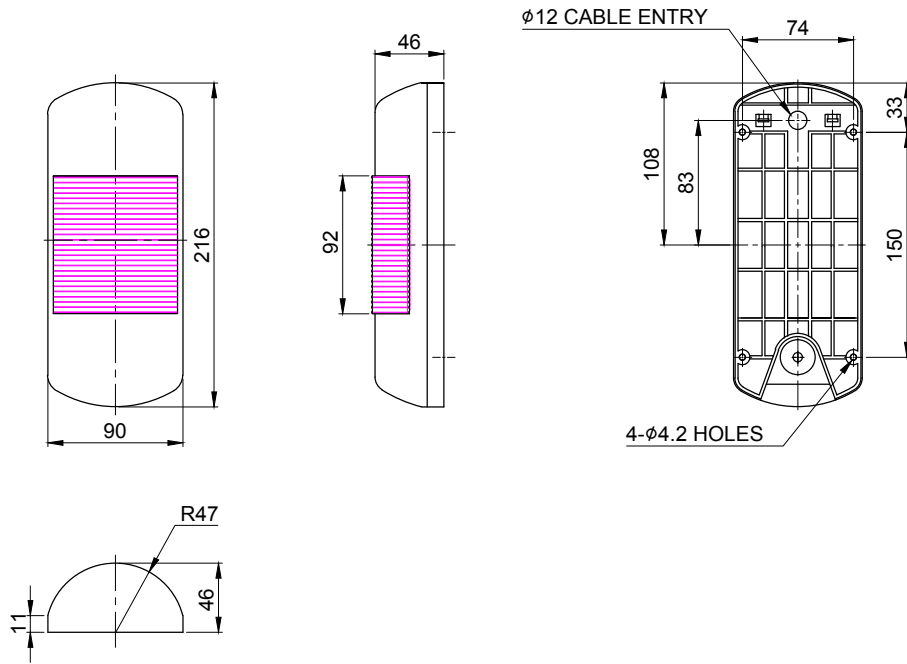
1 2 3 4 5 6

A

B



C

D



MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			SWTC			
MATERIAL			HOUSING-ABS			
			LENS-PC			
			COVER-ABS			
			FILTER LENS-PC			
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    )			
FLASHES PER MIN.			60~80			
USE VOLT.	LED	CURRENT	DC12V ~ DC24V	0.08W	MAX. 0.445A	
			AC110V		0.075A	
			AC220V		0.035A	
			VOLUME			MAX. 90dB at 1m
PROTECTION GRADE			WATER & DUST PROOF IP55			
CABLE ENTRY			ø12 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			MANY COLOR LED STEADY/ FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	<div></div>						
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							
						TITLE			MODEL			
						SWTC OUTLINE DRAWING			SWTC			
									DWG. NO.			
									SWTC_OUT			
						SCALE N/S		SIZE A4	REV 00	SHEET 1/1		

1 2 3 4 5 6 A4(297X210)